


Calibration Test Pump LPP 1000

- hydraulic operated (suitable for mineral oil based hydraulic fluids or clean water, free of calcium-carbonate / scale)
- generating test pressure up to 14 500 PSI (1000 bar)
- flexible high pressure test hose included

The portable Calibration Test Pump **LPP 1000** has been designed for easy to use pressure calibration equipment "in the field", for testing pressure gauges, pressure switches and pressure transmitters. 14 500 PSI (1000 bar) can be reached in a simple way, using the "prime/high pressure" selector. Reference instruments as electronic pressure calibrators LPC 300, LPC 200 and TLDMM as well as precision digital reference pressure gauges as TLDMM-A01, TLDMM-A02 and LDM 70 can be mounted directly on the top of the **LPP 1000**. High quality construction, no leakage.

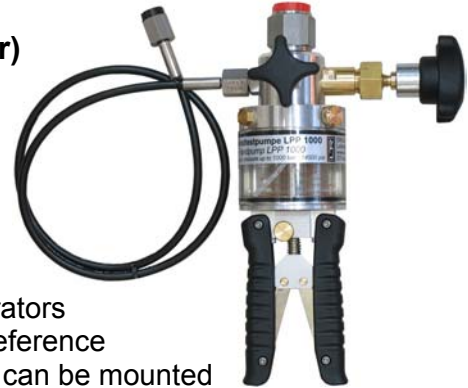


The Calibration Test Pump **LPP 1000** is supplied including a flexible high pressure test hose, length 1 m, with 1/4" BSP F port.

Specification:

Pressure ports:	for reference instrument: 1/2" BSP female, rotating, at the top of the pump. After dismantling of the 1/2" BSP swivel, you have a 3/8" BSP female thread, suitable for a lot of special reference instruments for test item: flexible high pressure test hose (length 1 m), with coupling to 1/4" BSP female thread
Liquid reservoir:	200 cm ³ (re-filling during pressure generation possible)
Construction:	High quality, no leakage, robust, portable, easy to handle
Pressure adjustment:	Pressure fine control and pressure release valve.
Dimensions / weight:	appr. 270 x 160 x 120 mm (without hose) / appr. 1.3 kg (without hose)
Option:	special version LPP-1000-S, suitable for brake fluid / SKYDROL.

Control elements LPP 1000:

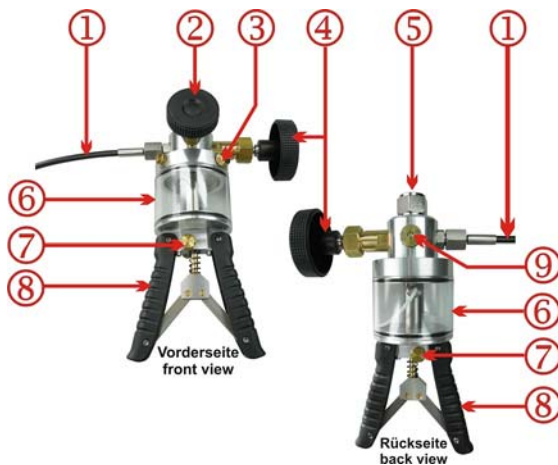

- (1) = flexible high pressure test hose PN 14500 PSI
- (2) = Pressure release valve, fine adjustable
- (3) = Liquid reservoir filling plug
- (4) = Fine control (volume adjustment)
- (5) = 1/2" BSP female rotating reference port
- (6) = Liquid reservoir
- (7) = Priming / high pressure switching knob
- (8) = Pump handles
- (9) = (Blind plug, never open!)



DRUCK & TEMPERATUR Leitenberger GmbH

Bahnhofstr. 33 • D-72138 Kirchentellinsfurt • Germany
Tel.: +49 - 71 21 - 9 09 20 - 0 • Fax: +49 - 71 21 - 9 09 20 - 99


E-Mail: DT-Export@Leitenberger.de • <http://www.druck-temperatur.de>



Available Types:

Type	Generating pressure up to	Order-Code
LPP 1000	14 500 PSI (1000 bar), suitable for mineral oil based hydraulic fluids or clean water, free of calcium-carbonate / scale. NOT suitable for distilled water or water based hydraulic fluids.	LPP-1000
LPP 1000-S	14 500 PSI (1000 bar), suitable for SKYDROL and other brake fluids NOT suitable for hydraulic oil	LPP-1000-S

Accessories:

Type	Description	Order-Code
Case	Plastic case with foams, for LPP 1000, hose, adapters and reference instrument	LPP-H-KOFFER
Adapter BSP	st.st. Adapter set (BSP) incl. spare O-rings, for test specimen port: 1/8" BSP, 3/8" BSP, 1/2" BSP M & F	LPP-ADAPTER-BSP
Adapter NPT	st.st. Adapter set (NPT), for test specimen port: 1/8" NPT, 1/4" NPT, 3/8" NPT, 1/2" NPT	LPP-ADAPTER-NPT
Adapter metric	st.st. Adapter set (metric) incl. spare O-rings, for test specimen port: M 12 x 1.5 and M 20 x 1.5	LPP-ADAPTER-M
Service	Service kit (seals, gaskets, ...) for LPP 1000	LPP-H-WARTUNG
Fluid	Special operating oil for LPP 1000 (1 l bottle)	CPB5000-FLUID
Analogue referenz-pressure gauge LPP-MANO 	Analogue reference pressure gauge DS 100 mm (4") Dial with fine graduation, knife pointer, pressure port 1/2" BSP male, range 0 - 60 bar / 0 - 800 PSI Accuracy $\pm 0.6\%$ f.s.	LPP-MANO-0060
	Ditto, 0 - 100 bar / 0 - 1400 PSI, accuracy $\pm 0.6\%$ f.s.	LPP-MANO-0100
	Ditto, 0 - 160 bar / 0 - 2000 PSI, accuracy $\pm 0.6\%$ f.s.	LPP-MANO-0160
	Ditto, 0 - 250 bar / 0 - 3000 PSI, accuracy $\pm 0.6\%$ f.s.	LPP-MANO-0250
	Ditto, 0 - 400 bar / 0 - 5000 PSI, accuracy $\pm 0.6\%$ f.s.	LPP-MANO-0400
	Ditto, 0 - 600 bar / 0 - 8000 PSI, accuracy $\pm 1.0\%$ f.s.	LPP-MANO-0600
	Ditto, 0 - 1000 bar / 0 - 14500 PSI, accuracy $\pm 1.0\%$ f.s.	LPP-MANO-1000
Recommended precision reference pressure instruments:		Accuracy:
• Electronic process calibrator LPC 300		$\pm 0.025\%$ f.s.
• Electronic pressure calibrator LPC 200		$\pm 0.025\%$ f.s. / $\pm 0.1\%$ m.v.
• Electronic pressure calibrator TLDMM		$\pm 0.05\%$ f.s.
• Digital precision reference pressure gauge TLDMM-A01		$\pm 0.1\%$ f.s.
• Digital precision reference pressure gauge TLDMM-A02		$\pm 0.2\%$ f.s.
• Digital test pressure gauge LDM 70-E25		$\pm 0.25\%$ f.s.
• Digital test pressure gauge LDM 70-K50		$\pm 0.5\%$ f.s.